

**GOVERNMENT OF ORISSA**



**PANCHAYATI RAJ DEPARTMENT**

**BID DOCUMENT**

**NAME OF THE WORK:** - Completion of Library-cum-study center building at Jhadeswar Mahabidyalaya, village – Tolkani, GP - Chitri

Bid Identification/DTCN No. **4365**, 29.12.21 / P.S Danagadi

**PANCHAYAT SAMITI, DANAGADI.**

**SCHEDULE-A (CERTIFICATE OF NO RELATIONSHIP)**

I/We hereby certify that I/We\* am/are\* related not related (\*) to any officer of PR Deptt. of the rank of Assistant Engineer & above and any officer of the rank of Assistant / Under Secretary and above of the P.R Deptt. Govt. Of Odisha. I/We\* am/are\* aware that, if the facts subsequently proved to be false, my/our contract will be rescinded with forfeiture of E.M.D and security deposit and I/We\* shall be liable to make good the loss or damage resulting from such cancellation. I/We also note that, non-submission of this certificate will render my / our tender liable for rejection.

(\*)Strike out which is not applicable.

**SCHEDULE-B CERTIFICATE OF EMPLOYMENT OF UNEMPLOYED GRADUATE ENGINEER/DIPLOMA HOLDERS (For special class / "A" class contractors only)**

I/ We hereby certify that at present the following Engineering personnel are working with me / in our firm / company and their bio-data are furnished below.

Sl. No.	Name of the Engineering personnel appointed for supervising contractor's work with address	Qualification	Date of Appointment	Monthly emolument	Whether full time engagement and continuous	If they are superannuated / retired / dismissed or removed personnel from state Govt. / Central Govt. / Public Sector undertaking / Private Companies and or any one ineligible for Government service.
1	2	3	4	5	6	7

**SCHEDULE- C FORMAT OF AFFIDAVIT**

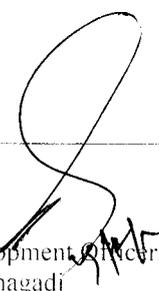
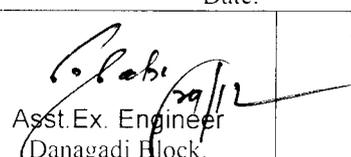

- The undersigned do hereby certify that all the statements made in the required attachments are true and correct.
- The undersigned also hereby certifies that neither our firm M/s \_\_\_\_\_ nor any of its constituent partners have abandoned any road/ bridge/Irrigation /Buildings or other project work in India nor any contract awarded to us for such works have been rescinded during the last five years prior to the date of this bid.
- The undersigned hereby authorized and request (s) any bank, person, firm or Corporation to furnish pertinent information as deemed necessary and as requested by the Department to verify this statement or regarding my (our) competency and general reputation.
- The undersigned understands and agrees that further qualifying information may be requested and agree to furnish any such information at the request of the Department.

(Signed by an Authorized Officer of the firm)

Title of Officer :

Name of Firm :

Date: :

 Block Development Officer, Danagadi	 Asst. Ex. Engineer (Danagadi Block.	APPROVED FOR (-----) pages only  Addl. Project Director (Tech.), DRDA. Jajpur
---	---	--

Sold for the work " Completion of Library-cum-study center building at Jhadeswar Mahabidyalaya, Village-Tolkani, GP- Chitri." ,Danagadi Block" on payment of Rs. -----/- (Rupees -----  
-----) only vide Money Receipt No ..... Dt ..... against BC / Bank Draft  
No..... Dt..... payable at SBI Duburi Project, Danagadi.

Block Development Officer,  
Danagadi

29-11-21

# BILL OF QUANTITIES

Name of the Work:

**COMPLETION OF JHADESWAR MAHABIDYALAYA LIBRARY ROOM AT TOLKANI**

Sl No.	Description of item of work	Quantity	Unit	Rate in Rs.	Amount In Rs
1	2	3	4	5	6
1	Filling in Foundation and Plinth and floor with sand in <b>Ground Floor</b> watered and rammed including all cost of sand, conveyance, royalty with labour and T & P required for the work.as per direction of Engineer-in-charge.	40.55	One Cubic meter	547.59	22205.00
2	Cement Concrete of proportion (1:4:8) in <b>Ground Floor</b> using 4cm and downgraded size Hard Granite Hand Broken metal for foundation, flooring concrete approved quality from approved quarry including hoisting, lowering and laying concrete to the required level ramming, watering, curing etc. complete including cost, conveyance, royalty of materials with all labour charges as directed by Engineer-in-Charge.	13.52	One Cubic meter	4091.51	55317.00
3	R.C.C. work of M-20 grade in <b>Ground Floor</b> with 20mm and down grade black hard granite (crusher broken) stone chips including hoisting and laying, cost, conveyance and royalty of materials, curing etc complete as per direction of Engineer-in-charge	46.81	One Cubic meter	4818.23	225541.00
4	R.C.C. work of M-20 grade in <b>1st Floor</b> with 20mm and down grade black hard granite (crusher broken) stone chips including hoisting and laying, cost, conveyance and royalty of materials, curing etc complete as per direction of Engineer-in-charge	61.25	One Cubic meter	4890.18	299524.00
5	Rigid and smooth centering & shuttering at all heights of all types of work using required scaffolding, T & P, centering shuttering including all taxes of materials cost of scaffolding conveyance and dismantling and disposing debris clear of work site complete as per the direction of the Engineer- in-charge.				
(a)	For columns, wall beam and cross beam in <b>ground floor and 1<sup>st</sup> floor</b>	277.46	One square meter	726.31	201522.00
(b)	For Lintel band in <b>1<sup>st</sup> floor</b>	121.15	One square meter	313.50	37981.00
(c)	For roof slab, verandah, door and window chajja, landing, balcony, sunshade etc in <b>ground floor</b> .	197.50	One square meter	425.16	83969.00
(d)	For roof slab, verandah, door and window chajja, landing, balcony, sunshade etc in <b>1st floor</b> .	222.13	One square meter	510.20	113331.00
6	Supplying, fitting, placing uncoated HYSD bar reinforcement for RCC work in <b>Ground Floor</b> including cost, conveyance and taxes of MS rods or HYSD steel and binding wires of 18-20 gauge and labour charges requires for the work etc. complete in all floors.	56.17	One qntl.	7489.76	420700.00
7	Supplying, fitting, placing uncoated HYSD bar reinforcement for RCC work in <b>1st Floor</b> including cost, conveyance and taxes of MS rods or HYSD steel and binding wires of 18-20 gauge and labour charges requires for the work etc. complete in all floors.	73.50	One qntl.	7510.09	551992.00
8	Fly ash brick in cement mortar (1:6) for super structure in <b>1<sup>st</sup> floor</b> having crushing strength not less than 75 kg/cm <sup>2</sup> with dimension tolerance +/- 8% incl. splays cutting circular moulding, chamfering and corbelling etc. incl. cost of all materials labour T&P, cess, etc. as per direction of Eng.in.charge.	52.11	One Cubic meter	5128.47	267245.00
9	16 MM (5/8") thick cement plaster in C.M.(1:6) in <b>1<sup>st</sup> floor</b> finishing smooth to inside rough surface of 5" / 10" thick brick walls after racking out the joints including watering and curing with cost, conveyance, royalty and taxes of all materials and cost of all labour charges required for the work etc., complete including cess.	591.08	One square meter	203.01	119995.00

10	12 mm (1/2") thick cement plaster in C.M.(1:6) in 1 <sup>st</sup> floor finishing smooth to outside smooth surface of brick walls after racking out the joints including watering and curing with cost. conveyance. royalty and taxes of all materials and cost of all labour charges required for the work etc. complete.	279.68	One square meter	144.73	40478.00
11	Supplying fitting fixing of MS doors & windows in 1 <sup>st</sup> floor incl. cost. conveyance. taxes. T & P of all materials etc complete including cess as per direction of Engineer-in Charge	1234.23	One kg.	75.10	92691.00
12	Supplying. fixing verified tiles (600mmx600mm) in floors for 1 <sup>st</sup> floor on 25mm thick bed of cement mortar(1:1) jointed with neat cement slurry.	199.02	One square meter	1371.42	272940.00
13	Supplying. fixing verified tiles (600mmx600mm) in walls, dado, skirting for 1 <sup>st</sup> floor on 12mm thick cement plaster(1:3) jointed with neat cement slurry.	19.23	One square meter	1011.72	19455.00
14	Supplying. fixing ceramic floor tiles (300mmx300mm) in floors, treads of steps, landings of 1 <sup>st</sup> floor on 25mm thick bed of cement mortar(1:1) jointed with neat cement slurry.	26.55	One square meter	1144.96	30399.00
15	Supplying. fixing chequered tiles in floor, treads of steps and landing (300mmx300mm) in ground floor on 25mm thick bed of cement mortar(1:1) jointed with neat cement slurry.	148.29	One square meter	811.73	120371.00
16	Supplying and painting 2 coats with synthetic enamel paint over one coat of primer on MS doors & windows in 1 <sup>st</sup> floor including cost of paint, labour, T&P, etc. complete. including cess.	73.71	One square meter	187.33	13808.00
17	Oil bound cement priming one coat to walls in 1 <sup>st</sup> floor of approved quality.	870.76	One square meter	50.60	44060.00
18	Supplying. finishing walls in 1 <sup>st</sup> floor with water proofing weather coat paint two coats of approved shade outside the building, T&P, labour, etc. all complete.	278.00	One square meter	70.53	19607.00
19	Wall painting two coats with plastic emulsion paint in 1 <sup>st</sup> floor including cost. conveyance. labour etc complete as per direction of Engineer-in-charge.	449.72	One square meter	76.76	34521.00
20	Supplying, fitting and fixing of window (sliding type) in 1 <sup>st</sup> floor made of Aluminium section 9778 as window frame section No. 4095, 4096 and 9777, 3994 as shutter frame with 5mm thick black glass as panel fitted with rubber beading including locking arrangement including all fittings, cost of glass etc complete as per direction of Engineer-in-charge.	20.16	One square meter	3581.72	72207.00
21	Providing, supplying and painting of sign board and display board of size 1.20m x 1.20m x 0.25m(thick) above G.L. and 0.45m below G.L. and shall be plastered, painted and writing etc. as per direction of Eng. In.charge..	1	One No.	5000.00	5000.00
<b>Total</b>					<b>3164859.00</b>

Total 21 ( Twenty One ) items Only (Rupees Thirty One Lakh Sixty Four Thousand Eight Hundred Fifty Nine) only.

Approved

Asst. Executive Engineer, Danagadi

BDO, Danagadi

Addl. Project Director (Tech.),  
DRDA, Jajpur

My / our quoted rate is \_\_\_\_\_ % (both in figures and words) excess over /  
less than / equal to the above estimated cost.

Signature of Tenderer